




Others

## Heavy Duty Turnbuckle, Type T2

Non-standard sizes or custom products available on request

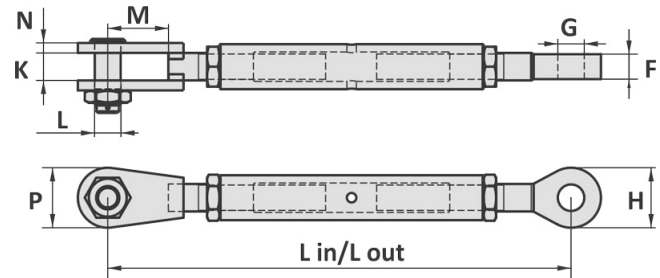

- Material : high tensile steel
- Safety factor : 5 times
- Finish : painted
- Temperature range : -20°C up to +200°C
- Standard certification : Certificate of Conformity

- This type of rigging screws meets the requirements as laid down in the Dutch, British, American and other dock regulations.
- On request deliverable with 2 securing nuts or plates.
- Custom designed screws can be constructed in any size and capacity.
- Rigging screws are supplied with trapezium thread.

WLL ton	Art. No. Jaw-Jaw	L in mm	L out mm	Art. No. Eye-Eye	L in mm	L out mm	Art. No. Jaw-Eye	L in mm	L out mm	Thread
13.5	107.42013000	935	1260	107.42013001	840	1165	107.42013002	890	1215	Tr 55x8
17	107.42017000	1010	1360	107.42017001	920	1270	107.42017002	965	1315	Tr 65x8
25	107.42025000	1085	1415	107.42025001	975	1305	107.42025002	1030	1360	Tr 70x8
30	107.42030000	1160	1530	107.42030001	1020	1390	107.42030002	1090	1460	Tr 75x8
35	107.42035000	1250	1650	107.42035001	1100	1500	107.42035002	1175	1575	Tr 80x8
45	107.42045000	1300	1780	107.42045001	1170	1650	107.42045002	1235	1715	Tr 90x8
55	107.42055000	1380	1890	107.42055001	1270	1780	107.42055002	1325	1835	Tr 100x8
70	107.42070000	1480	2025	107.42070001	1390	1940	107.42070002	1435	1985	Tr 110x8
85	107.42085000	1565	2200	107.42085001	1515	2150	107.42085002	1540	2175	Tr 120x8
100	107.42100000	1630	2360	107.42100001	1600	2330	107.42100002	1615	2345	Tr 130x8
120	107.42120000	1745	2340	107.42120001	1735	2330	107.42120002	1740	2335	Tr 140x8
160	107.42160000	1870	2470	107.42160001	1860	2460	107.42160002	1865	2465	Tr 160x8
200	107.42200000	2020	2640	107.42200001	2000	2620	107.42200002	2010	2630	Tr 180x8
250	107.42250000	2170	2840	107.42250001	2210	2880	107.42250002	2190	2860	Tr 200x8

WLL ton	K mm	N mm	M mm	L mm	P mm	F mm	H mm	G mm	Weight J-J kg	Weight E-E kg	Weight J-E kg
13.5	55	20	122	51	120	50	120	53	45	36	41
17	65	28	130	63	140	55	140	65	72	55	62
25	76	30	145	70	140	70	140	72	83	60	73
30	80	35	160	72	150	70	150	74	100	68	85
35	90	40	175	80	170	80	170	82	140	96	117
45	100	45	175	90	190	90	190	93	177	117	146
55	110	50	175	100	210	100	210	103	232	156	194
70	110	55	175	108	230	100	230	111	293	200	245
85	130	75	175	127	270	125	270	130	441	270	363
100	140	90	175	140	290	125	290	143	607	364	485
120	155	90	190	152	340	140	340	155	740	490	615
160	170	100	210	178	380	160	380	181	967	614	791
200	190	110	250	190	400	170	400	193	1380	720	1050
250	210	120	280	250	520	190	520	253	1825	832	1345

Tolerance: Forged parts ± 5%, machined parts ± 1 mm

(Important note: Measures and weights without engagement. We reserve the right to change technical details.)