




Webbing slings

Polyester endless webbing slings, WLL 1-10 t, single layer

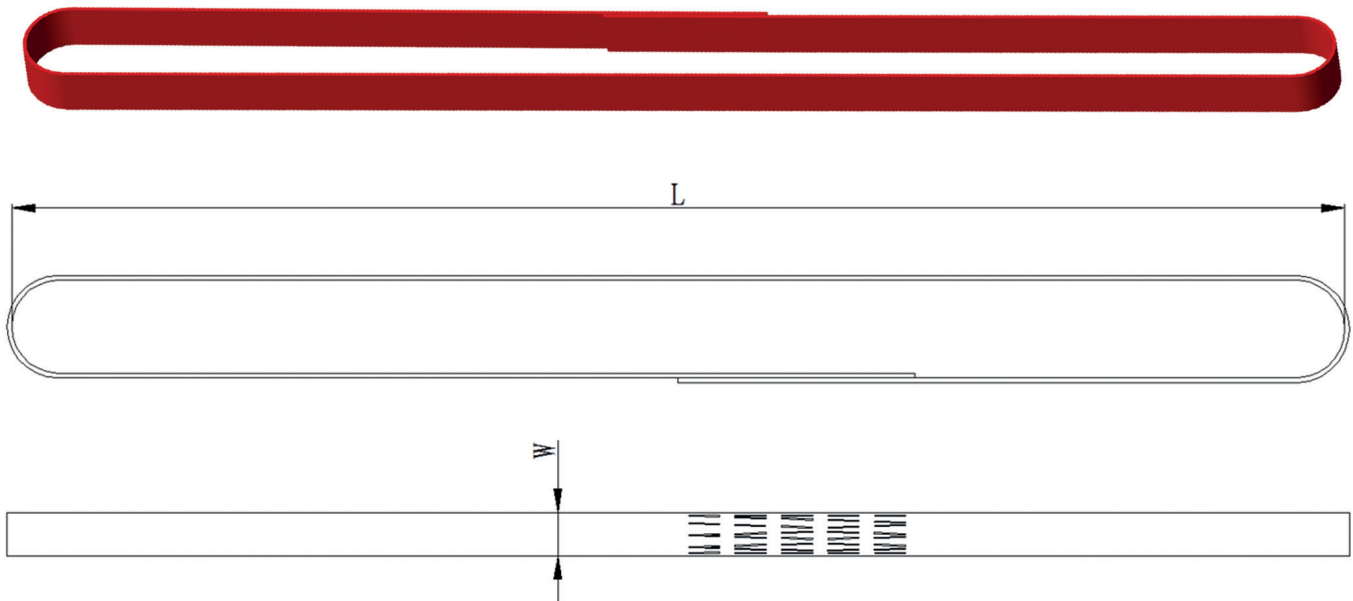

- Standard : EN1492-1
- Safety factor : 7:1
- Packing : as per customer request, with user instruction and CE manufacturer's declaration in shrink foil available

Item code**	WLL (t)	Webbing width* (mm)	Colour	Thickness (mm)
E-EB-30-1T-X	1	30	purple	3
E-EB-60-2T-X	2	60	green	3
E-EB-90-3T-X	3	90	yellow	3
E-EB-120-4T-X	4	120	grey	3
E-EB-150-5T-X	5	150	red	3
E-EB-180-6T-X	6	180	brown	3
E-EB-240-8T-X	8	240	blue	3
E-EB-300-10T-X	10	300	orange	3

* Other webbing widths on request available. / ** X = Length L

- Label : one side stitched, label protection on request available; with logo or other details available
- Print : letters / motives / logos are printable in black, special colours on request

(Important note: Measures and weights without engagement. We reserve the right to change technical details.)