




Webbing slings

## Polyester one-way webbing slings, WLL 1-5 t, single layer

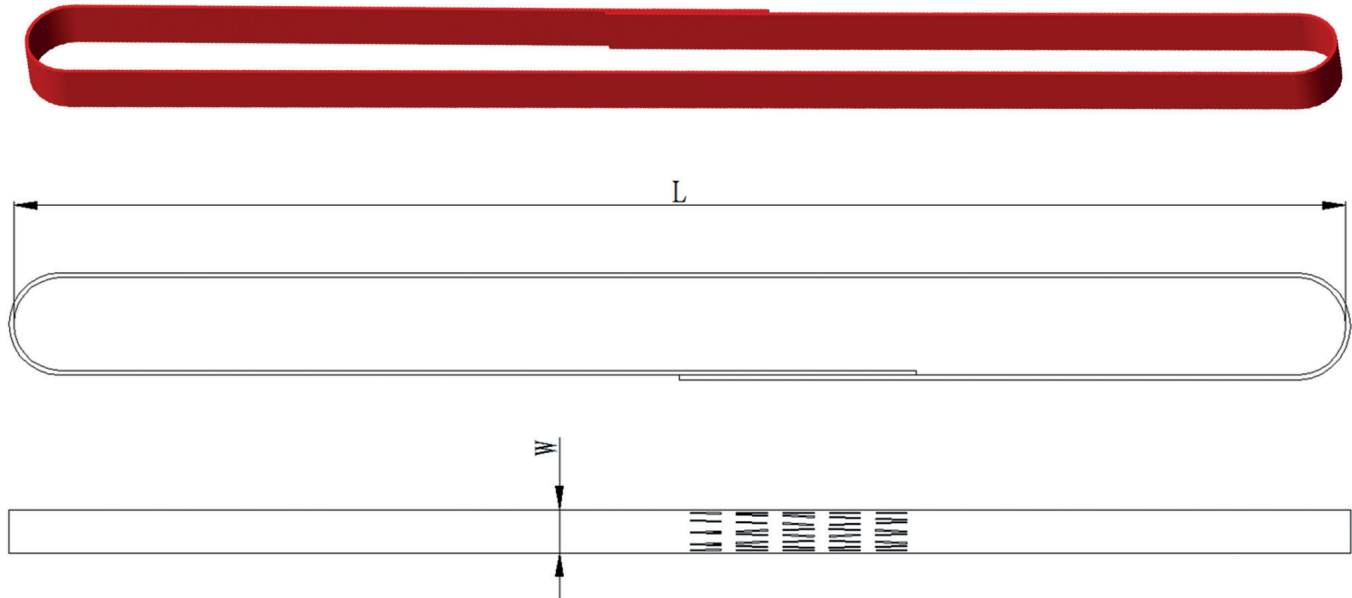

- Standard : DIN60005
- Safety factor : 5:1
- Packing : as per customer request, with user instruction and CE manufacturer's declaration in shrink foil available

Item code**	WLL (t)	Webbing width* (mm)	Thickness (mm)
E-OB-25-..T-X	1	25	...
E-OB-35-..T-X	2	35	...
E-OB-48-..T-X	3	48	...
E-OB-50-..T-X	4	50	...
E-EB-75-..T-X	5	75	...

\* Other webbing widths on request available. / \*\* X = Length L

- Colour : white, black, orange, other webbing colours on request available
- Label : one side stitched, label protection on request available; with logo or other details available
- Print : letters / motives / logos are printable in black, special colours on request

(Important note: Measures and weights without engagement. We reserve the right to change technical details.)