



One way webbing and accessories

One way webbing



Art. No.	Width (mm)	Weight (g/m) ± 5 %	Min. Linear Breaking Strength (daN / lbf)	Theoretical * System Breaking Strength (daN / lbf)	Elongation at 33 % MBL (%)	m / Bag	Bags / Pallet	Pallet dimension (cm)	Pallet weight (kg)	Pallets / 20' FCL	Pallets / 40' FCL
H85	25	21	1200 / 2600	1920 / 4230	< 5	300	30	112 x 80 x 112	± 330	28	56
H95	32	37	2000 / 4400	3400 / 7500	< 5	250	30	112 x 80 x 112	± 308	28	56
H105	32	42	2300 / 5100	4000 / 9000	< 5	250	30	112 x 80 x 112	± 315	28	56
H120	38	40	2000 / 4400	3400 / 7500	< 5	250	30	112 x 80 x 112	± 330	28	56
H150	38	62	3500 / 7700	6000 / 13500	< 5	200	25	112 x 80 x 112	± 340	28	56
H200	40	85	5000 / 11000	8500 / 19100	< 5	200	20	112 x 80 x 112	± 370	28	56
H200L	40	70	4000 / 8800	6800 / 15000	< 5	200	22	112 x 80 x 112	± 338	28	56
H300	50	41	2000 / 4400	3400 / 7500	< 5	250	30	112 x 80 x 112	± 338	28	56
H500	50	87	5000 / 11000	8500 / 19100	< 5	200	20	112 x 80 x 112	± 378	28	56
H600	50	105	6000 / 13200	10200 / 22400	< 5	150	23	112 x 80 x 112	± 392	28	56
H750	50	130	7500 / 16500	12750 / 28100	< 5	150	20	112 x 80 x 112	± 420	28	56
H1000	75	175	10000 / 22000	17000 / 37500	< 5	100	20	112 x 80 x 112	± 380	28	56
H1500	75	270	15000 / 33000	25500 / 56200	< 5	100	15	112 x 80 x 112	± 435	28	56

* See table on next page for tested system MBL values for different buckle/webbing combinations


Important notes:

- Up to 10% of the bags per order can contain 2 pcs of webbing. In case a bag contains 2 pcs, each pcs length is minimum 30 meters long
- Webbing available in any color; webbing printing as per customer request is possible

(Important note: Measures and weights without engagement. We reserve the right to change technical details.)

One way webbing and accessories

One way webbing system MBL test results

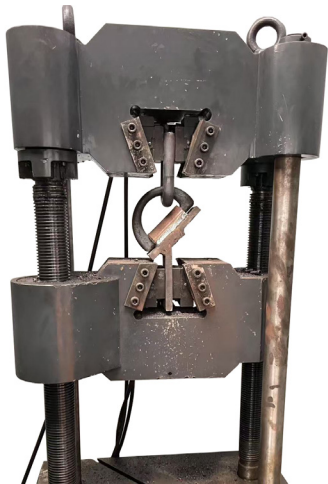

Type	Width (mm)	Webbing Minimum Linear Breaking Strength (daN / lbf)	Theoretical System Breaking Strength (daN / lbf)	Tested System Breaking Strength Range (daN)	Tested with Buckle Type
H85	25	1200 / 2600	1920 / 4230	-	-
H95	32	2000 / 4400	3400 / 7600	3000 - 3200	S35P
H95	32	2000 / 4400	3400 / 7600	3500 - 3700	B3030
H95	32	2000 / 4400	3400 / 7600	3400 - 3600	B3530A
H95	32	2000 / 4400	3400 / 7600	3400 - 3600	B3530B
H105	32	2300 / 5100	4000 / 9000	3500 - 3700	S35P
H105	32	2300 / 5100	4000 / 9000	4200 - 4400	B3030
H105	32	2300 / 5100	4000 / 9000	4000 - 4200	B3530A
H105	32	2300 / 5100	4000 / 9000	4000 - 4200	B3530B
H120	38	2000 / 4400	3400 / 7600	3600 - 3800	B4050
H150	38	3500 / 7700	6000 / 13400	6300 - 6500	B4050
H200L	40	4000 / 8800	6800 / 15200	7200 - 7400	B4050
H200	40	5000 / 11000	8500 / 19100	8000 - 8200	B4050
H200	40	5000 / 11000	8500 / 19100	8500 - 8700	B4050B
H300	50	2000 / 4400	3400 / 7600	3900 - 4100	B5050, B50100
H300	50	2000 / 4400	3400 / 7600	3500 - 3700	S50P
H500L	50	3000 / 6600	5100 / 11400	5300 - 5500	B5050, B50100
H500	50	5000 / 11000	8500 / 19100	9300 - 9500	B50100
H600	50	6000 / 13200	10200 / 22900	10800 - 11000	B50100
H750	50	7500 / 16500	12750 / 28600	13000 - 13200	B50100
H1000	75	10000 / 22000	17000 / 38000	-	-
H1500	75	15000 / 33000	25500 / 57300	-	-

(Important note: Measures and weights without engagement. We reserve the right to change technical details.)