

- Material : drop forged high tensile steel
- Finish : hot dip galvanized
- Meet federal specifications : FF-T791b, Type 1 Form 1
- WLL : MBL = 5 x WLL | Proof load = 2,5 x WLL
- Packing : as per customer request

Size	WLL t	Weight kg	Dimensions (mm)						
			a	b	c	d	e	f	g
1/4 x 4"	0.22	0.12	6.35	299.7	198.1	5.7	8.63	19.8	38.7
5/16 x 1 1/2"	0.36	0.2	7.87	344.4	230.1	7.1	11.17	23.8	45.9
3/8 x 6"	0.54	0.34	9.6	443.7	291.3	8.76	13.46	28.4	55.2
1/2 x 6"	0.99	0.69	12.7	510	332.2	11.17	18.28	36.06	70.8
1/2 x 9"	0.99	0.76	12.7	662	408.4	11.17	18.28	36.06	70.8
1/2 x 12"	0.99	0.97	12.7	814.8	484.6	11.17	18.28	36.06	70.8
5/8 x 6"	1.58	1.09	16	557	372.8	12.7	22.35	45.7	86.36
5/8 x 9"	1.58	1.28	16	709.4	449	12.7	22.35	45.7	86.36
5/8 x 12"	1.58	1.55	16	861.8	525.2	12.7	22.35	45.7	86.36
3/4 x 6"	2.35	1.72	19	606.5	416	15.7	25.4	53.08	103.4
3/4 x 9"	2.35	2.09	19	758.9	492.2	15.7	25.4	53.08	103.4
3/4 x 12"	2.35	2.48	19	911.3	568.4	15.7	25.4	53.08	103.4
3/4 x 18"	2.35	3.26	19	1,216	720.8	15.7	25.4	53.08	103.4
7/8 x 12"	3.26	3.27	22.35	941.5	592.3	19.05	31.75	60.4	110.49
7/8 x 18"	3.26	4.51	22.35	1,246.3	744.7	19.05	31.75	60.4	110.49
1 x 6"	4.5	4.1	25.4	710.4	507.2	22.2	36.5	76.2	139.3
1 x 12"	4.5	5.2	25.4	1,015	659.6	22.2	36.5	76.2	139.3
1 x 18"	4.5	6.3	25.4	1,320	812	22.2	36.5	76.2	139.3
1 x 24"	4.5	7.8	25.4	1,624.8	964.4	22.2	36.5	76.2	139.9
1 1/4 x 12"	6.89	8.6	31.7	1,087.3	718.8	28.5	45.9	90.4	167.5
1 1/4 x 18"	6.89	10.4	31.7	1,392	871.4	28.5	45.9	90.4	167.5
1 1/4 x 24"	6.89	12.2	31.7	1,696.9	1,023.8	28.5	45.9	90.4	167.5
1 1/2 x 12"	9.7	12.4	38.1	1,155.7	774.7	31.7	53.8	103.1	187.2
1 1/2 x 18"	9.7	14	38.1	1,460.5	927	31.7	53.8	103.1	187.2
1 1/2 x 24"	9.7	17	38.2	1,765.3	1,079.5	31.7	53.8	103.1	187.2
1 3/4 x 18"	12.7	23.8	44.4	1,457.4	1,000.2	38.1	60.4	117.3	215.9
1 3/4 x 24"	12.7	26.3	44.4	1,762	1,152.6	38.1	60.4	117.3	215.9
2 x 24"	16.7	38.6	50.8	1,922.5	1,312.9	44.45	68.3	146	288
2 1/2 x 24"	27.02	65.4	64	1,996.9	1,387.3	50.8	79.2	165.1	299.2
2 3/4 x 24"	34	87.9	69.8	2,057.4	1,447.8	57.1	82.5	177.8	329.4

(Important note: Measures and weights without engagement. We reserve the right to change technical details.)

Your exclusive agent:


Stuut Lifting & Lashing -
 ☎ +49 5228 9628290
 Further information:

SLL Handelsvertretung e.K.
 ✉ sales@lifting-lashing.de
 www.lifting-lashing.de



Stuut Lifting & Lashing

...the best link between you and the manufacturer

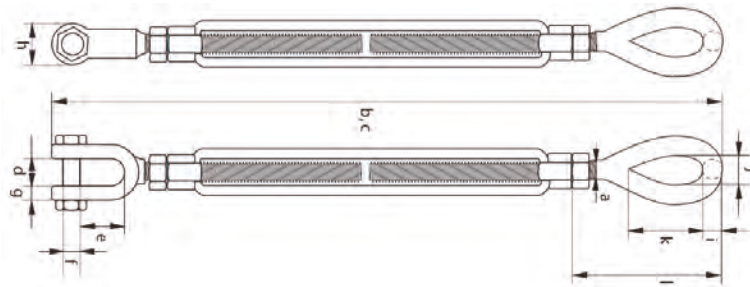

- Material : drop forged high tensile steel
- Finish : hot dip galvanized
- Meet federal specifications : FF-T791b, Type 1 Form 1
- WLL : MBL = 5 x WLL | Proof load = 2,5 x WLL
- Packing : as per customer request

Size	WLL t	Weight kg	Dimensions (mm)							
			a	b	c	d	e	j	k	l
1/4 x 4"	0.23	0.14	6.35	288.29	186.69	11.43	15.75	8.64	19.81	44.45
5/16 x 1 1/2"	0.36	0.23	7.87	348.23	221.23	12.7	22.1	11.18	23.88	53.09
3/8 x 6"	0.54	0.36	9.65	426.97	274.57	13.72	22.1	13.46	28.45	64.01
1/2 x 6"	1	0.68	12.7	489.97	312.17	13.97	26.92	18.29	36.07	82.04
1/2 x 9"	1	0.78	12.7	642.37	388.37	13.97	26.92	18.29	36.07	82.04
1/2 x 12"	1	0.94	12.7	794.77	464.57	13.97	26.92	18.29	36.07	82.04
5/8 x 6"	1.59	1.07	16	533.15	349	20.83	33.27	22.35	45.72	99.06
5/8 x 9"	1.59	1.44	16	685.55	425.2	20.83	33.27	22.35	45.72	99.06
5/8 x 12"	1.59	1.64	16	837.95	501.4	20.83	33.27	22.35	45.75	99.06
3/4 x 6"	2.36	1.81	19.05	576.33	385.83	26.16	38.1	25.40	53.09	119.13
3/4 x 9"	2.36	2.15	19.05	728.73	462.03	26.16	38.1	25.40	53.09	119.13
3/4 x 12"	2.36	2.69	19.05	881.13	538.23	26.16	38.1	25.40	53.09	119.13
3/4 x 18"	2.36	3.18	19.05	1,185.93	690.63	26.16	38.1	25.40	53.09	119.13
7/8 x 12"	3.27	3.79	22.35	916.69	567.44	31.24	44.45	31.75	60.45	129.54
7/8 x 18"	3.27	4.42	22.35	1,221.49	719.84	31.24	44.45	31.75	60.45	129.54
1 x 6"	4.54	4.05	25.4	669.04	465.84	33.27	52.32	36.58	76.2	161.54
1 x 12"	4.54	5.08	25.4	973.84	618.24	33.27	52.32	36.58	76.2	161.54
1 x 18"	4.54	6.03	25.4	1,278.64	770.64	33.27	52.32	36.58	76.2	161.54
1 x 24"	4.54	7.71	25.4	1,583.44	923.04	33.27	52.32	36.58	76.2	161.54
1 1/4 x 12"	6.89	8.81	31.75	1,049.53	681.23	47.24	71.37	45.97	90.42	196.09
1 1/4 x 18"	6.89	10.97	31.75	1,354.33	833.63	47.24	71.37	45.97	90.42	196.09
1 1/4 x 24"	6.89	12.93	31.75	1,659.13	986.03	47.24	71.37	45.97	90.42	196.09
1 1/2 x 12"	9.71	13.15	38.1	1,104.9	647.7	57.15	71.37	53.85	103.12	218.95
1 1/2 x 18"	9.71	15.88	38.1	1,409.7	876.3	57.15	71.37	53.85	103.12	218.95
1 1/2 x 24"	9.71	17.77	38.2	1,714.5	1,028.7	57.15	71.37	53.85	103.12	218.95
1 3/4 x 18"	12.7	24.38	44.45	1,406.65	949.45	66.04	85.85	60.45	117.35	254
1 3/4 x 24"	12.7	27.52	44.45	1,711.45	1,101.85	66.04	85.85	60.45	117.35	254
2 x 24"	16.78	40.37	50.8	1,844.55	1,234.95	66.55	93.73	68.33	146.05	332.49
2 1/2 x 24"	27.22	68.04	63.5	1,925.32	1,315.72	77.72	112.78	79.25	165.1	350.01
2 3/4 x 24"	34.02	83.01	69.85	1,978.15	1,368.55	93.47	106.43	82.55	177.8	386.59

(Important note: Measures and weights without engagement. We reserve the right to change technical details.)

Your exclusive agent:


Stuut Lifting & Lashing -
 ☎ +49 5228 9628290
 Further information:

SLL Handelsvertretung e.K.
 ✉ sales@lifting-lashing.de
 www.lifting-lashing.de



Stuut Lifting & Lashing

...the best link between you and the manufacturer

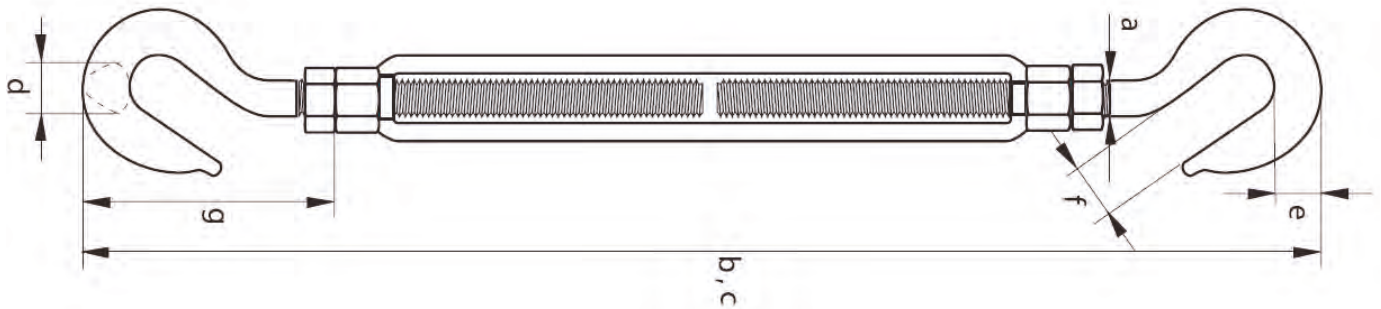

- Material : drop forged high tensile steel
- Finish : hot dip galvanized
- Meet federal specifications : FF-T791b, Type 1 Form 1
- WLL : MBL = 5 x WLL | Proof load = 2,5 x WLL
- Packing : as per customer request

Size	WLL t	Weight kg	Dimensions (mm)					
			a	b	c	e	f	g
1/4 x 4"	0.18	0.14	6.35	303.28	201.68	10.41	11.43	40.39
5/16 x 1 1/2"	0.32	0.21	7.87	350.77	236.47	12.7	12.7	49.28
3/8 x 6"	0.45	0.35	9.65	450.09	297.69	15.49	14.22	58.42
1/2 x 6"	0.68	0.73	12.7	517.65	339.85	19.81	16.76	74.68
1/2 x 9"	0.68	0.83	12.7	670.05	416.05	19.81	16.76	74.68
1/2 x 12"	0.68	1.03	12.7	822.45	492.25	19.81	16.76	74.68
5/8 x 6"	1.02	1.25	16	571.5	387.35	25.4	22.86	93.73
5/8 x 9"	1.02	1.53	16	723.9	463.55	25.4	22.86	93.73
5/8 x 12"	1.02	1.59	16	876.3	539.75	25.4	22.86	93.73
3/4 x 6"	1.36	1.76	19.05	629.41	438.91	30.48	24.89	114.81
3/4 x 9"	1.36	2.4	19.05	781.81	515.11	30.48	24.89	114.81
3/4 x 12"	1.36	2.46	19.05	934.21	591.31	30.48	24.89	114.81
3/4 x 18"	1.36	3.68	19.05	1,239.01	734.71	30.48	24.89	114.81
7/8 x 12"	1.81	3.67	22.35	984.25	635	34.93	28.7	131.83
7/8 x 18"	1.81	4.51	22.35	1,289.05	787.4	34.93	28.7	131.83
1 x 6"	2.27	4.23	25.4	728.73	525.53	38.86	31.75	148.34
1 x 12"	2.27	5.41	25.4	1,033.53	677.93	38.86	31.75	148.34
1 x 18"	2.27	6.35	25.4	1,338.33	830.33	38.86	31.75	148.34
1 x 24"	2.27	7.82	25.4	1,643.13	982.73	38.86	31.75	148.34
1 1/4 x 12"	2.95	9.34	31.75	1,119.12	750.82	45.97	38.1	183.39
1 1/4 x 18"	2.95	10.43	31.75	1,423.92	903.22	45.97	38.1	183.39
1 1/4 x 24"	2.95	12.25	31.75	1,728.72	1,055.62	45.97	38.1	183.39
1 1/2 x 12"	3.4	12.47	38.1	1,204.98	823.98	44.45	47.75	211.84
1 1/2 x 18"	3.4	14.06	38.1	1,509.78	976.38	44.2	47.75	211.84
1 1/2 x 24"	3.4	17.01	38.1	1,814.58	1,128.78	44.45	47.75	211.84

(Important note: Measures and weights without engagement. We reserve the right to change technical details.)

Your exclusive agent:

Stuut Lifting & Lashing -

☎ +49 5228 9628290

Further information:

SLL Handelsvertretung e.K.

✉ sales@lifting-lashing.de

www.lifting-lashing.de


Version: YUE, 2018-08-21, GB



Stuut Lifting & Lashing

...the best link between you and the manufacturer

© Copyright 2018 Stuut Lifting & Lashing. All rights reserved.

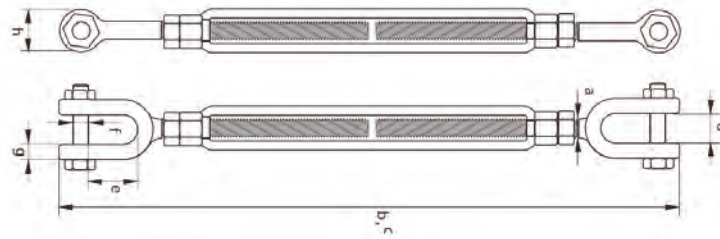

- Material : drop forged high tensile steel
- Finish : hot dip galvanized
- Meet federal specifications : FF-T791b, Type 1 Form 1
- WLL : MBL = 5 x WLL | Proof load = 2,5 x WLL
- Packing : as per customer request

Size	WLL t	Weight kg	Dimensions (mm)				
			a	b	c	d	e
1/4 x 4"	0.23	0.16	6.35	302.26	200.66	11.43	15.75
5/16 x 1 1/2"	0.36	0.24	7.874	353.06	238.76	12.7	22.1
3/8 x 6"	0.54	0.37	9.652	441.45	289.05	13.72	22.1
1/2 x 6"	1	0.71	12.7	508	330.2	13.97	26.92
1/2 x 9"	1	0.79	12.7	660.4	406.4	13.97	26.92
1/2 x 12"	1	1.09	12.7	812.8	482.6	13.97	26.92
5/8 x 6"	1.59	1.23	16.002	562.1	377.95	20.83	33.27
5/8 x 9"	1.59	1.56	16.002	714.5	454.15	20.83	33.27
5/8 x 12"	1.59	1.77	15.002	866.9	539.35	20.83	33.27
3/4 x 6"	2.36	1.86	19.05	612.14	421.64	26.16	38.1
3/4 x 9"	2.36	2.48	19.05	764.54	497.84	26.16	38.1
3/4 x 12"	2.36	2.92	19.05	916.94	574.04	26.16	38.1
3/4 x 18"	2.36	3.66	19.05	1,221.74	726.44	26.16	38.1
7/8 x 12"	3.27	3.71	22.352	966.98	617.73	31.24	44.45
7/8 x 18"	3.27	4.89	22.352	1,271.78	770.13	31.24	44.45
1 x 6"	4.54	4.62	25.4	712.72	509.52	33.27	52.32
1 x 12"	4.54	5.68	25.4	1,017.52	661.92	33.27	52.32
1 x 18"	4.54	6.87	25.4	1,322.32	814.32	33.27	52.32
1 x 24"	4.54	8.2	25.4	1,627.12	966.72	33.27	52.32
1 1/4 x 12"	6.89	9.34	31.75	1,118.62	750.32	47.24	71.37
1 1/4 x 18"	6.89	11.19	31.75	1,423.42	902.72	47.24	71.37
1 1/4 x 24"	6.89	12.79	31.75	1,728.22	1,055.12	47.24	71.37
1 1/2 x 12"	9.71	13.92	38.1	1,181.1	800.1	57.15	71.37
1 1/2 x 18"	9.71	16.67	38.1	1,485.9	952.5	57.15	71.37
1 1/2 x 24"	9.71	18.45	38.1	1,790.7	1,104.9	57.15	71.37
1 3/4 x 18"	12.7	24.49	44.45	1,503.17	1,045.97	66.04	85.85
1 3/4 x 24"	12.7	28.74	44.45	1,807.97	1,198.37	66.04	85.85
2 x 24"	16.78	42.75	50.8	1,948.69	1,339.09	66.55	93.73
2 1/2 x 24"	27.22	74.84	63.5	2,087.37	1,477.77	77.72	112.78
2 3/4 x 24"	34.02	89.81	69.85	2,171.7	1,562.1	93.47	106.43

(Important note: Measures and weights without engagement. We reserve the right to change technical details.)

Your exclusive agent:

Stuut Lifting & Lashing -
 ☎ +49 5228 9628290
 Further information:

SLL Handelsvertretung e.K.
 ✉ sales@lifting-lashing.de
 www.lifting-lashing.de



Stuut Lifting & Lashing

...the best link between you and the manufacturer